


TREAD WIDTH:
LAUFFLÄCHENBREITE: 358 mm +/- 2.5 %

Tire Label / Reifen Label



FULDA 570624
435/50R19.5 160 J C3

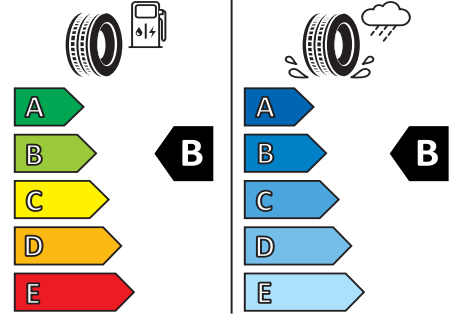

2020/740

100

TIRE SIZE REIFENGRÖSSE	435/50 R 19.5	RIM WIDTH: RECOMMENDED FELGENBREITE: EMPFOHLEN	14.00 "	DIRECTIONAL TIRE LAUFRICHTUNGSGEWUNDEN	Nein / No
TREAD DESIGN REIFENBEZEICHNUNG	REGIOTONN3 TL	ETRTO MIN.	14.00 "	TIRE APPLICATION PROFILART	Regional Haul Regionalverkehr
LOAD / SPEED INDEX (SINGLE / DUAL)	160J	MAX.	15.00 "	TIRE POSITION PROFILEIGNUNG	Trailer Anhängerrachse
TRAGF. / GESCHW. INDEX (EINZEL / ZWILLING)		INFLATION PRESSURE LUFTDRUCK	900 kPa (9.00 bar)	MINIMUM DUAL SPACING MINDESTMITTENABSTAND	MAX. SPEED / GESCHWINDIGKEIT
MAX. AXLE LOAD (SINGLE / DUAL) MAX. ACHSLAST (EINZEL / ZWILLING)	9000 kg / - kg	TIRE OUTSIDE DIAMETER (+/- 1.5 %) AUSSENDURCHMESSER (+/- 1.5 %)	926 mm	CARCASS / KARKASSEN MATERIAL	1 Steel / Stahl
ECE R54 HOMOLOGATION	E13 0023441+02S2WR2	TIRE WIDTH (+/- 1.5 %) REIFENBREITE (+/- 1.5 %)	429 mm	BELT MATERIAL GÜRTEL MATERIAL	4 Steel / Stahl
		TREAD DEPTH / PROFILTIEFE (+/- 0.2mm)	13.3 mm	MANUFACTURING COUNTRY HERSTELLUNGSLAND	LUX
		TIRE VOLUME / REIFENVOLUMEN	147 l	MARKING / MARKIERUNGEN	
ECE NUMBER (NOISE) ECE NUMBER (GERÄUSCH)	E13 0221622S2	STAT. LOADED RADIUS (+/- 1.5 %) STAT. HALBMESSESSER (+/- 1.5 %)	422 mm	DOT	Ja / Yes
ECE NUMBER (ROLL. R.) ECE NUMBER (ROLLW.)	E13 0221624R2	ROLLING CIRCUMFERENCE (+/- 2 %) ABROLLUMFANG (+/- 2 %)	2852 mm	M+S	Ja / Yes
ECE NUMBER (WET GRIP) ECE NUMBER (NASSHAFTUNG)	E13 0221623W	TIRE WEIGHT (+/- 2 %) REIFENGEWICHT (+/- 2 %)	60.7 kg	3PMSF Snow Flake	Ja / Yes
ECE NUMBER (SNOW GRIP) ECE NUMBER (SCHNEEHAFTUNG)	E13 0221907SGI	REGROOVING DEPTH / NACHSCHNEIDETIEFE MAX. RUN-OUT / MAX. HOEHENSCHLAG	3.0 mm 2.4 mm		
ECE NUMBER (VECTO) ECE NUMBER (VECTO)		REINFORCED SIDEWALL RIB SEITENWANDVERSTÄRKUNG	Nein / No	SPECIAL MARKING SPEZIALMARKIERUNG	FRT
SIDEWALL WEAR INDICATOR VERSCHLEISSINDIKATOREN	Nein / No	DIMENSIONS ACCORDING ETRTO: MAX. DIAMETER: 931 mm MAX. WIDTH: 456 mm ABMESSUNGEN NACH ETRTO: MAX. DURCHMESSER: 931 mm MAX. BREITE: 456 mm			

1

APPRD. BY: Y. Duval
Date: 4. Aug. 2023

DEPT.: 7984

GOODYEAR CONFIDENTIAL PROPRIETARY BUSINESS INFORMATION

GOODYEAR S.A. considers this drawing and the subject matter thereof to be proprietary and confidential and such shall not be reproduced, copied or used except to the extent authorized by GOODYEAR in writing. All copyright, patent and design rights are reserved.

GOODYEAR INNOVATION CENTER LUXEMBOURG

For instructions on service, care, maintenance, repair, re-grooving, mounting and dismounting of tires, ETRTO recommendations are to be observed, available at <http://www.etrto.org>

Zur Bedienung, Pflege, Wartung, Reparatur, Nachschneiden, Montage und Demontage von Reifen sind die ETRTO Empfehlungen unter <http://www.etrto.org> zu beachten

TIRE: 435/50 R 19.5 REGIOTONN3 TL - REV01