


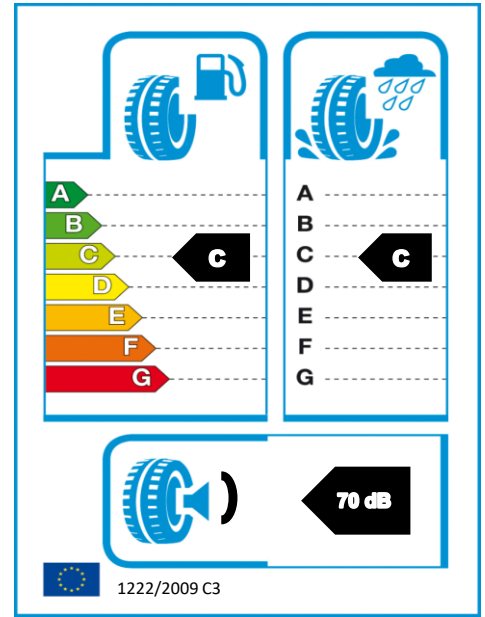

← TREAD WIDTH: 216 mm +/- 2.5 %  
LAUFLÄCHENBREITE: →

**Tire Label / Reifen Label**


TIRE SIZE REIFENGRÖSSE	265/70 R 19.5	RIM WIDTH: RECOMMENDED FELGENBREITE: EMPFOHLEN	7.50 "	DIRECTIONAL TIRE LAUFRICHTUNGSGEBUNDEN	Nein / No
TREAD DESIGN REIFENBEZEICHNUNG	ECOTONN LPT 3PMSF TL	ETRTO MIN. MAX.	7.50 " 8.25 "	TIRE APPLICATION PROFILART	Regional Haul Regionalverkehr
LOAD / SPEED INDEX (SINGLE / DUAL)	143/141J	INFLATION PRESSURE LUFTDRUCK	850 kPa (8.50 bar)	TIRE POSITION PROFILEIGNUNG	Trailer Anhängerrachse
TRAGF. / GESCHW. INDEX (EINZEL / ZWILLING)		MINIMUM DUAL SPACING MINDESTMITTENABSTAND	295 mm	MAX. SPEED / GESCHWINDIGKEIT CARCASS / KARKASSEN MATERIAL	100 km/h 1 Steel / Stahl
MAX. AXLE LOAD (SINGLE / DUAL) MAX. ACHSLAST (EINZEL / ZWILLING)	5450 kg / 10300 kg	TIRE OUTSIDE DIAMETER (+/- 1.5 %) AUSSENDURCHMESSER (+/- 1.5 %)	873 mm	BELT MATERIAL GÜRTEL MATERIAL	4 Steel / Stahl
ECE R54 HOMOLOGATION	E13 0020486+02S2WR2	TIRE WIDTH (+/- 1.5 %) REIFENBREITE (+/- 1.5 %)	265 mm	MANUFACTURING COUNTRY HERSTELLUNGSLAND	POL
		TREAD DEPTH / PROFILTIEFE (+/- 0.2mm) TIRE VOLUME / REIFENVOLUMEN	12.3 mm 69.5 l	MARKING / MARKIERUNGEN	
ECE NUMBER (NOISE) ECE NUMBER (GERÄUSCH)	E13 0223518S2	STAT. LOADED RADIUS (+/- 1.5 %) STAT. HALBMESSER (+/- 1.5 %)	402 mm	DOT M+S	Ja / Yes Ja / Yes
ECE NUMBER (ROLL. R.) ECE NUMBER (ROLLW.)	E13 0223520R2	ROLLING CIRCUMFERENCE (+/- 2 %) ABROLLUMFANG (+/- 2 %)	2665 mm	3PMSF Snow Flake	Ja / Yes
ECE NUMBER (WET GRIP) ECE NUMBER (NASSHAFTUNG)	E13 0223519W	TIRE WEIGHT (+/- 2 %) REIFENGEWICHT (+/- 2 %)	39.3 kg		
ECE NUMBER (SNOW GRIP) ECE NUMBER (SCHNEEHAFTUNG)	E13 0223521SGI	REGROOVING DEPTH / NACHSCHNEIDETIEFE MAX. RUN-OUT / MAX. HOEHENSCHLAG	3.0 mm 2.6 mm		
		REINFORCED SIDEWALL RIB SEITENWANDVERSTÄRKUNG	Nein / No	SPECIAL MARKING SPEZIALMARKIERUNG	FRT
SIDEWALL WEAR INDICATOR VERSCHLEISSINDIKATOREN	Nein / No	DIMENSIONS ACCORDING ETRTO: MAX. DIAMETER: 881 mm MAX. WIDTH: 272 mm ABMESSUNGEN NACH ETRTO: MAX. DURCHMESSER: 881 mm MAX. BREITE: 272 mm			

**1**

 APPRD. BY: Y. Duval  
Date: 12. Nov. 2020

DEPT.: 7984

**GOODYEAR CONFIDENTIAL PROPRIETARY BUSINESS INFORMATION**

GOODYEAR S.A. considers this drawing and the subject matter thereof to be proprietary and confidential and such shall not be reproduced, copied or used except to the extent authorized by GOODYEAR in writing. All copyright, patent and design rights are reserved.

**GOODYEAR INNOVATION CENTER LUXEMBOURG**

 For instructions on service, care, maintenance, repair, re-grooving, mounting and dismounting of tires, ETRTO recommendations are to be observed, available at <http://www.etrto.org>

 Zur Bedienung, Pflege, Wartung, Reparatur, Nachschneiden, Montage und Demontage von Reifen sind die ETRTO Empfehlungen unter <http://www.etrto.org> zu beachten

**TIRE: 265/70 R 19.5 ECOTONN LPT 3PMSF TL - REV01**